

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
29 January 2004 (29.01.2004)

PCT

(10) International Publication Number  
**WO 2004/010531 A1**

(51) International Patent Classification: **H01Q 5/00, 9/04**

(21) International Application Number:  
PCT/EP2002/007837

(22) International Filing Date: 15 July 2002 (15.07.2002)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **FRAC-**  
**TUS, S.A.** [ES/ES]; Avenida Alcalde Barnils 64-68, Ed-  
ificio Testa, Modulo C3, E-08190 Sant Cugat Del Valles  
(Barcelona) (ES).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SOLER CAS-**  
**TANY, Jordi** [ES/ES]; Avenida Alcalde Barnils 64-68,  
Edificio Testa, Modulo C3, E-08190 Sant Cugat Del

Valles (Barcelona) (ES). **PUEENTE BALIARDA, Carles**  
[ES/ES]; Avenida Alcalde Barnils 64-68, Edificio Testa,  
Modulo C3, E-08190 Sant Cugat Del Valles (Barcelona)  
(ES).




(74) Agent: **CARPINTERO LOPEZ, Francisco**; Herrero &  
Asociados, S.L., Alcalá, 35, 28014 MADRID (ES).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,  
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,  
VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SI, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: NOTCHED-FED ANTENNA



(57) Abstract: A novel notched-fed antenna is defined in the present invention. The shape of the radiating element is modified by inserting a set of notches next to the feeding area. By means of this configuration, the antenna provides a small size, a multifrequency behavior or a combination of both effects and hence it can be used in those environments where a compact, small or multiband antenna is required.

WO 2004/010531 A1

**WO 2004/010531 A1**



ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,  
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*

## **NOTCHED-FED ANTENNA**

### **OBJECT OF THE INVENTION**

5       The present invention relates to a novel notched-fed antenna which features a smaller size with respect to prior art antennas, a multifrequency behavior or a combination of both effects.

10       The radiating element of the novel notched-fed antenna consist of a polygonal, multilevel or loaded shape and a set of notches inserted next to the feeding zone of said polygonal, multilevel structures or loaded shapes.

15       The invention refers to a new type of notched-fed antenna which is mainly suitable for mobile communications or in general to any other application where a compact, small or multiband antenna is required.

### **BACKGROUND OF THE INVENTION**

20       The growth of the telecommunication sector, and in particular, the expansion of personal mobile communication systems are driving the engineering efforts to develop multiservice (multifrequency) and compact systems which require multifrequency and small antennas. Therefore, the use of a multisystem small antenna, which provides coverage of the maximum number of services, is nowadays of notable interest since it permits telecom operators to reduce their costs and to minimize the environmental impact.

30       A variety of techniques used to reduce the size of the antennas can be found in the prior art. A.G. Kandoian (A.G.Kandoian, "Three new antenna types and their applications, Proc. IRE, vol. 34, pp. 70W-75W, February 1946) introduced the concept of loaded antennas and demonstrated how the length of a quarter wavelength monopole can be reduced by adding a conductive disk at the top of

the radiator. Other top-loaded antennas were introduced by Goubau, as it is illustrated in U.S. Patent No.3,967,276, or described in U.S. Patent No.5,847,682 entitled "Top loaded triangular printed antenna". However, in all these prior art solutions the basis of the mechanism of how the antenna size is reduced can be found in the capacitive component introduced by the addition of the loading structure at the top of the radiating element. In contrast, the present invention discloses a new mechanism for reducing the antenna size and obtain a multiband behaviour.

J.McLean ("Broadband, robust, low profile monopole incorporating top loading, dielectric loading, and a distributed capacitive feed mechanism", Antennas and Propagation Society, 1999. IEEE International Symposium 1999, vol. 3, pp. 1562-1565 ) describes a top-loaded antenna which includes a capacitive feed .

Some previously reported dual-band antennas use a spur line filter which may be partially similar in shape to the present invention. However, this previous solution is used for patch antennas, which have both, a configuration and radiation mechanism, different from a monopole or dipole antenna, which are considered in the present invention.

Two other different alternatives to achieve an antenna with a multiband and/or small size performance are multilevel antennas, Patent WO0122528 entitled "Multilevel Antennas", and miniature space-filling antennas, Patent WO0154225 entitled "Space-filling miniature antennas".

## SUMMARY OF THE INVENTION

The key point of the invention is the shape of the radiating element which includes a set of notches inserted on the edge of the radiating element and located at a distance to the feeding point, said distance being shorter than a half of the longest edge of the said radiating element, and wherein the

maximum width of said notch or notches is smaller than a half of the longest length of said notches. According to the present invention the antenna is a monopole or a dipole which includes at least one notch. Also, in some embodiments the antenna includes multiple notches with different shapes and lengths in a radiating element shaped by means of a polygonal, multilevel or loaded structure. From the perspective of the present invention, circular or elliptical shapes are considered polygonal structures with a large number of sides. In this case, the longest edge is considered as a quarter of the perimeter of the circular or elliptical shape.

Due to the addition of the notches in the vicinity of the feeding point, the antenna features a small size, a multiband behaviour, a wideband behaviour or a combination of said effects.

The novel monopole or dipole antenna can include one, two or more notches, which can be inserted either at one side of the feeding point or at both sides of the feeding point.

The notched-fed antenna can include one notch intersecting itself at one point. Also, the antenna can include at least two notches which intersect one with the other at least at one point.

The notches included in the radiating element can be shaped using a space-filling curve or using a curve composed by a minimum of two segments and a maximum of nine segments which are connected in such a way that each segment forms an angle with their neighbours, wherein, no pair of adjacent segments define a longer straight segment.

Fig.1 and Fig.2 show some examples of the radiating element for a notched-fed antenna according to the present invention.

The main advantage of this novel notched-fed antenna with respect to prior-art antennas is two-folded

- The antenna features a small performance, a multiband behaviour, wideband behaviour or a combination of said effects.
- Given the physical size of the radiating element including the notches, said antenna can be operated at a lower frequency than most of the prior art antennas

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig.1 shows an antenna including several notches in different configurations for two different structures; those are, a triangle and a trapezoid. In case 1, the radiating element includes two identical notches (1a) and (1b), while in case 2 the radiating element only includes one notch (2a). Case 3 represents a more general example of an antenna with two notches (3a) and (3b) with different lengths. Case 4 is a similar case than case 3. Drawings 5, 6 or 7 describe three examples where the distance from the feeding point to the location of the notches is larger than in the previous cases. Case 6 includes two notches (6a) and (6b) with different lengths and shapes. Cases 8 to 12 show a notched-fed antenna where the radiating element is a trapezoid structure. In case 9, the antenna includes one notch, which is a curve composed by four segments which are connected in such a way that each segment forms an angle with their neighbours, and wherein, no pair of adjacent segments define a larger straight segment. Case 11 shows a notched-fed antenna with two notches (11a) and (11b), which intersect at one point. In any of the embodiments in Fig.1, the notch intersects the perimeter of the radiating arm of the monopole at a point located at a distance from the feeding point which is shorter than half of the longest edge of the perimeter of said radiating arm, according to the present

invention. Also, in any case the width of the notch is narrower than half of its length, according to the present invention.

Fig.2 shows three new configurations of the notched-fed antenna. Cases 13 and 14 show an example of antenna with two different notches, being one of the notches shaped as a curve which intersects itself one point. Case 15 is an antenna with two different notches shaped with two different space-filling curves. Drawing 16 describes an antenna with two different notches shaped as a curve similar to the curve described in case 9. Finally, cases 17 and 18 describe two other examples of notched-fed antenna. Case 18 shows an elliptical radiating element with two identical notches.

Fig.3 describes, in case 19, a loaded radiating element with two inserted notches, while case 20 shows a multilevel radiating element including two notches in a similar configuration to case 19.

Fig.4 shows three particular cases of notched-fed monopole. They consist of a monopole comprising a conducting or superconducting ground plane with an opening to allocate a coaxial cable (21) with its outer conductor connected to said ground plane and the inner conductor connected to the notched-fed antenna. The radiating element can be optionally placed over a supporting dielectric (23) and include a second parallel conductor (24).

Fig.5 shows a notched-fed antenna consisting of a dipole wherein each of the two arms includes two notches. The lines at the vertex of the small triangles (25) indicate the input terminal points. The two drawings display different configurations of the same basic dipole; in the lower drawing the radiating element is supported by a dielectric substrate (23).

Fig.6 shows in the upper drawing, an example of a dipole antenna including two notches shaped as space-filling curves at each antenna arm but fed as an

aperture antenna. The lower drawing shows another aperture antenna, wherein the aperture (18) is practiced on a conducting or superconducting structure (27), said aperture being shaped as an elliptical structure including two notches.

5

Fig.7 shows an antenna array (28) including notched-fed radiating elements (1).

#### DETAILED DESCRIPTION OF SOME PREFERRED EMBODIMENTS

10

A preferred embodiment of the notched-fed monopole antenna is shown in Fig.4. The radiating element includes two notches (1a) and (1b) with the same shape, each one inserted at one point on the edge of the radiating element. Particularly, both notches are located at a distance to the feeding point (1c) shorter than a half of the longest edge of the radiating element and where the maximum width of both notches is smaller than a half of the longest length of the notches. Moreover, one notch is inserted at one side of the feeding point, and the other is inserted at the opposite side with respect to the feeding point. The monopole includes a conducting or superconducting counterpoise or ground plane (22). A handheld case, or even a part of the metallic structure of a car or train can act as such a ground counterpoise. The ground and the monopole arm (1) are excited as usual in prior art monopole by means of, for instance, a transmission line (21). Said transmission line is formed by two conductors, one of the conductors connected to the ground plane or counterpoise while the other is connected to a point of the conducting or superconducting notched-fed antenna. In Fig.4, a coaxial cable (21) has been taken as particular case of transmission line, but it is clear to any skilled in the art that other transmission lines (such as for instance a microstrip arm) could be used to excite the monopole. Optionally, and following the scheme just described, the notched-fed monopole can be printed, for instance, over a dielectric substrate (23). Also,

15

20

25

30



the notched-fed monopole can include a second conductor (24) parallel to the radiating element and located from the radiating element a distance smaller than a quarter of the longer operating wavelength. The space between the radiating element and the second conductor (24) can be filled with air, dielectric or a combination of both.

Fig.5 describes a preferred embodiment of the invention. A two-arm notched-fed dipole antenna is constructed comprising two conducting or superconducting parts, each part being a notched-fed structure. The dipole includes two identical notches, but optionally, it could include only one notch. For the sake of clarity but without loss of generality, a particular case of the notched-fed dipole (1) has been chosen here; obviously, other structures, as for instance, those described in Fig. 1, could be used instead. The two closest apexes of the two arms form the input terminals (25) of the dipole. The terminals (25) have been drawn as conducting or superconducting wires, but as it is clear to those skilled in the art, such terminals could be shaped following any other pattern as long as they are kept small in terms of the operating wavelength. The skilled in the art will notice that, the arms of the dipoles can be rotated and folded in different ways to finely modify the input impedance, the radiation parameters of the antenna such as, for instance, polarization, or both features.

Another preferred embodiment of a notched-fed dipole is also shown in Fig.5 where the notched-fed arms are printed over a dielectric substrate (23); this method is particularly convenient in terms of cost and mechanical robustness when the shape of the radiating element contains a high number of polygons, as happens with multilevel structures. Any of the well-known printed circuit fabrication techniques can be applied to pattern the notched-fed structure over the dielectric substrate. Said dielectric substrate can be, for instance, a glass-fibre board (FR4), a teflon based substrate (such as Cuclad®) or other standard radiofrequency and microwave substrates (as for instance Rogers

4003<sup>®</sup> or Kapton<sup>®</sup>). The dielectric substrate can be, for instance, a portion of a window glass if the antenna is to be mounted in a motor vehicle such as a car, a train or an airplane, to transmit or receive radio, TV, cellular telephone (GSM900, GSM1800, UMTS) or other communication services electromagnetic waves. Of course, a balun network can be connected or integrated in the input terminals of the dipole to balance the current distribution among the two dipole arms.

The first embodiment in Fig.6 consist of an aperture configuration of a notched-fed antenna using two space-filling curves for the notches. The feeding techniques can be one of the techniques usually used in conventional aperture antennas. In the described figure, the inner conductor of the coaxial cable (26) is directly connected to one side of the strip connected to the square-shaped radiating element and the outer conductor to the other side of the said strip. Other feeding configurations are possible, such as for instance a capacitive coupling.

Another preferred embodiment of the notched-fed antenna is a notched-fed aperture antenna as shown in the lower drawing in Fig.6. In this figure the notched-fed elliptical structure (18) is impressed over a conducting or superconducting sheet (27). Such sheet can be, for instance, a sheet over a dielectric substrate in a printed circuit board configuration, a transparent conductive film such as those deposited over a glass window to protect the interior of a car from heating infrared radiation, or can even be a part of the metallic structure of a handheld telephone, a car, train, boat or airplane. The feeding scheme can be any of the well known in conventional slot antenna and it does not become an essential part of the present invention. In all said two illustrations in Fig. 6, a coaxial cable has been used to feed the antenna, with one of the conductors connected to one side of the conducting sheet and the other connected at the other side of the sheet across the slot. A

microstrip transmission line could be used, for instance, instead of a coaxial cable.

5 Fig.7 describes another preferred embodiment. It consists of an antenna array (28) which includes a notched-fed dipole antenna (1).

**CLAIMS**

5 1.- A monopole or dipole antenna characterized in that the radiating element includes at least one notch, wherein at least one of said notches intersects at least at one point on the edge of said radiating element, wherein said intersecting point is located at a distance to the feeding point, said distance being shorter than a half the length of the longest edge of the said radiating element, and wherein the maximum width of said notch or notches is narrower than a half of the longest length of said notches.

10

2.- A monopole or dipole antenna according to claim 1 characterized in that the radiating element includes one notch

15

3.- A monopole or dipole antenna according to claim 1 characterized in that the radiating element includes two notches

20

4.- A monopole or dipole antenna according to claim 1 and 3 characterized in that the radiating element includes two notches, wherein the first notch is inserted at one side of the feeding point, and the other is inserted at the opposite side with respect to the feeding point.

25

5.- A monopole or dipole antenna according to claim 3 or 4 wherein the two notches have the same shape.

6.- A monopole or dipole antenna according to claim 4 comprising a radiating element with at least a first and a second notch, wherein said second notch is different in shape from said first notch, being such difference in length, shape or both.

7.- A monopole or dipole antenna according to claim 1, 2, 3, 4, 5 or 6 wherein the antenna includes at least one notch, said notch being shaped as a curve, said curve intersecting itself at least at one point.

5 8.- A monopole or dipole antenna according to claim 1, 2, 3, 4, 5, 6 or 7 where the antenna includes at least two notches, said notches intersect one with the other at least at one point.

10 9.- A monopole or dipole antenna according to claim 1, 2, 3, 4, 5, 6, 7 or 8 wherein the perimeter of said radiating element is a shape chosen from the following set: triangular, square, rectangular, trapezoidal, pentagonal, hexagonal, heptagonal or octagonal.

15 10.- A monopole or dipole antenna according to claim 1, 2, 3, 4, 5, 6, 7 or 8 wherein the perimeter of said radiating element has a circular or elliptical shape, and wherein, for a circular or elliptical shape, the longest edge is considered as a quarter of the perimeter of a circular or elliptical shape.

20 11.- A monopole or dipole antenna according to claim 1, 2, 3, 4, 5, 6, 7, 8, 9 or 10 wherein at least a portion of said radiating element is a multilevel structure or a loaded structure.

25 12.- A monopole or dipole antenna according to claim 1, 2, 3, 4, 5, 6, 7, 8, 9, 10 or 11 wherein at least one notch is a curve composed by a minimum of two segments and a maximum of nine segments which are connected in such a way that each segment forms an angle with their neighbours, wherein, no pair of adjacent segments define a larger straight segment.

30 13.- A monopole or dipole antenna according to claim 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11 or 12 wherein the shape of at least a portion of one notch is a space-filling curve.

14.- A monopole or dipole antenna according to claims 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12 or 13 where the radiating element includes at least a second conductor parallel to the radiating element, said second conductor being located at a distance from the radiating element smaller than a quarter of the central operating wavelength, and wherein the space between the radiating element and said second conductor can be filled with air or a dielectric or a combination of both.

15.- An antenna wherein the radiating element is an aperture antenna, said antenna characterized in that the aperture has the shape of a notched-fed antenna according to any of the preceding claims.

16.- An antenna according to claims 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14 or 15, wherein said antenna is an element of an antenna array, said array including at least a notched-fed antenna.

17.- An antenna according to any of the preceding claims, characterized in that the antenna is shorter than a quarter of the central operating wavelength.

18.- An antenna according to any of the preceding claims, characterized in that the antenna features a similar radiation pattern and input impedance at more than once frequency bands.

1/7

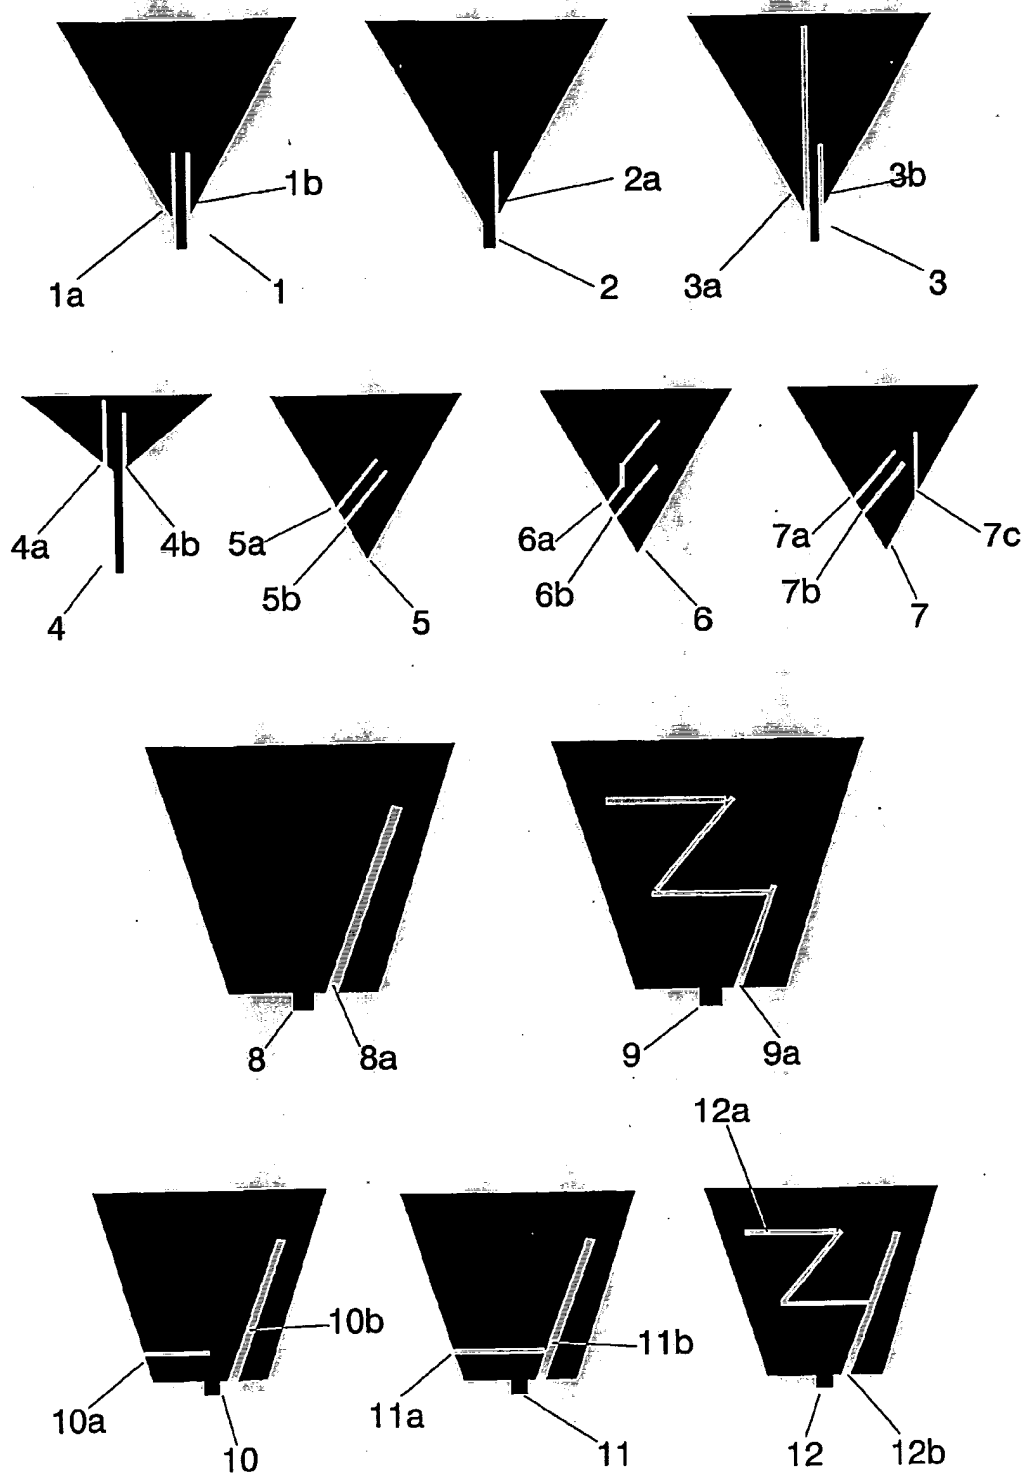


FIG.1

2/7

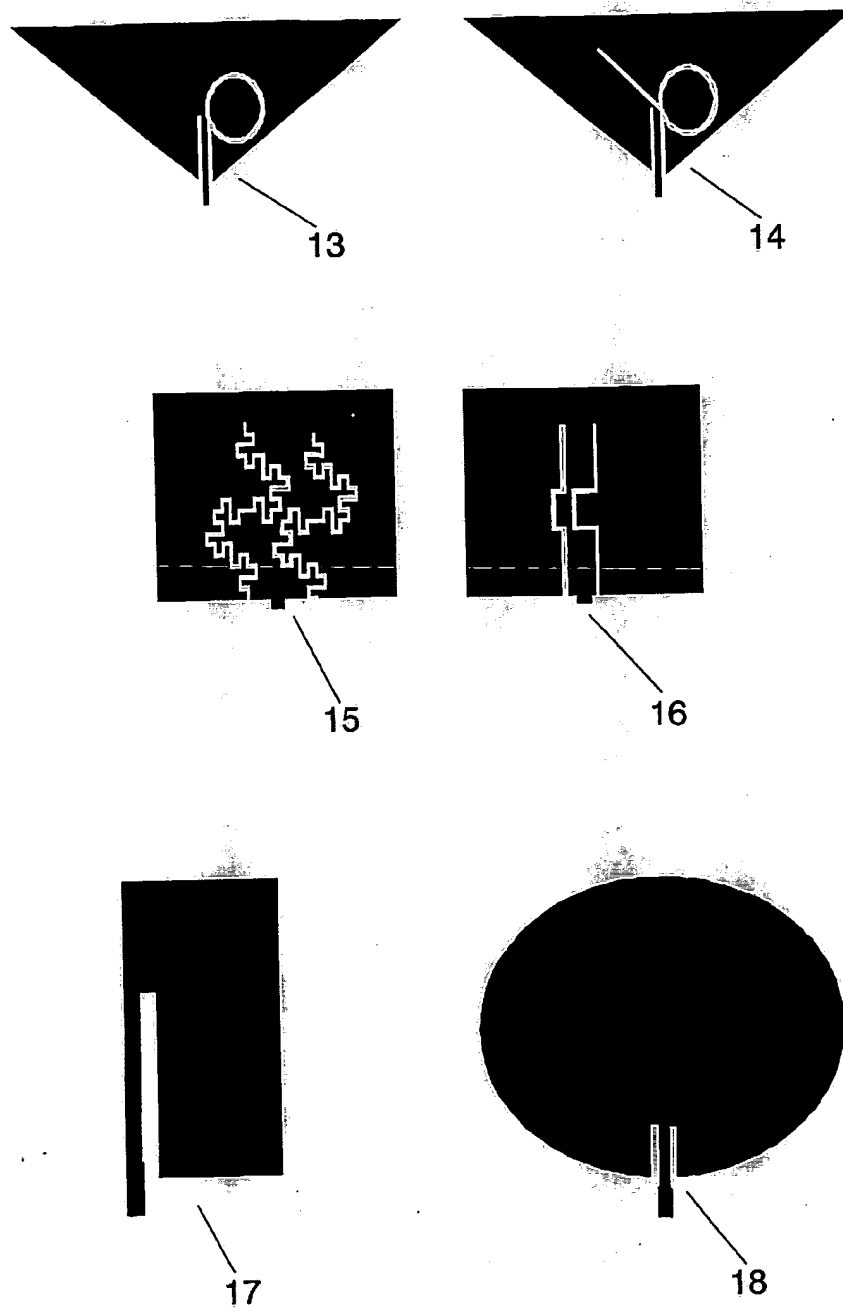


FIG.2



3/7

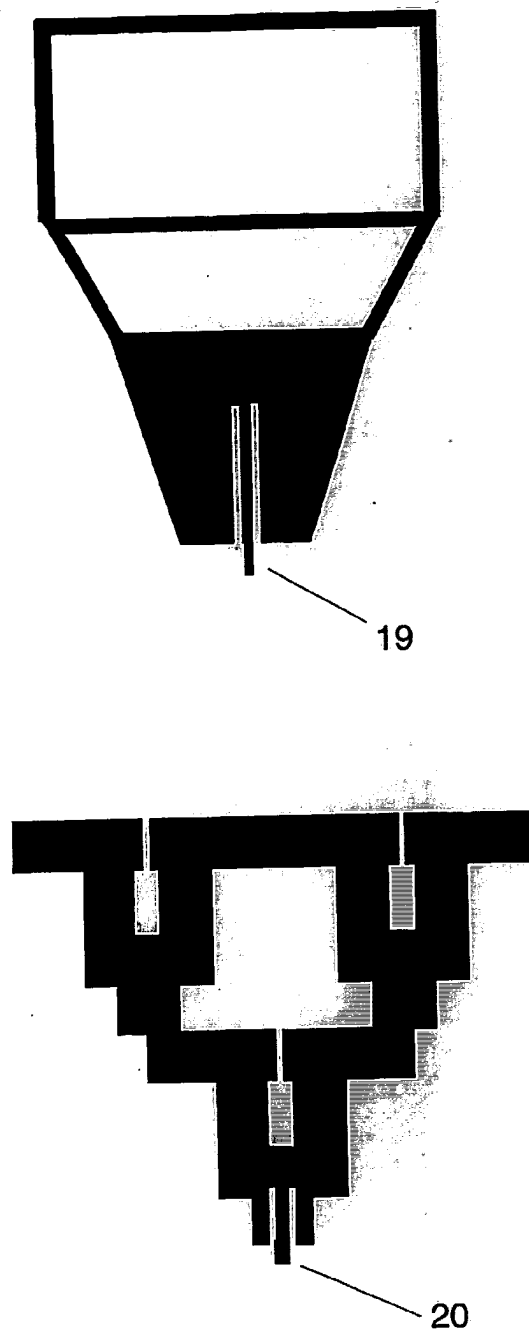


FIG.3

4/7

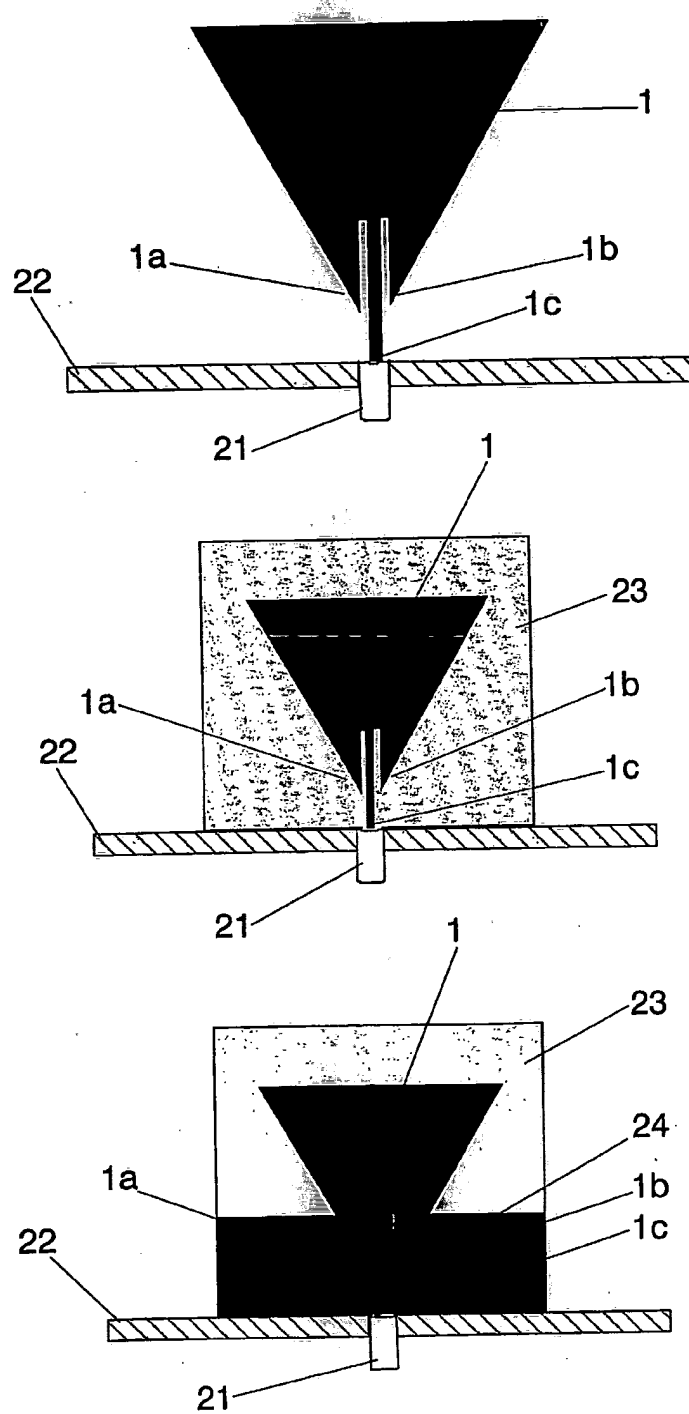


FIG.4

5/7

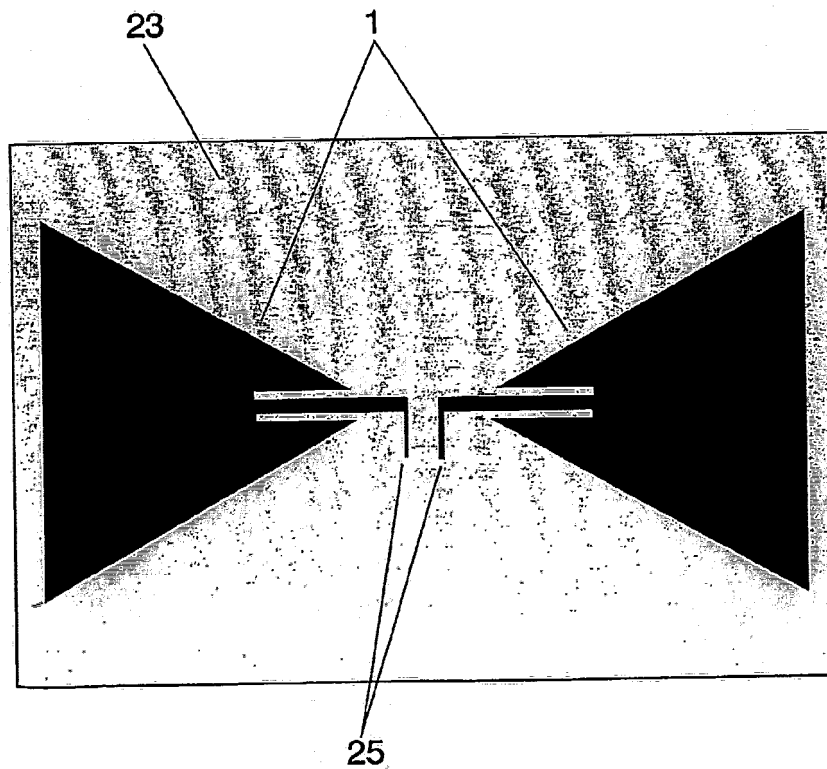
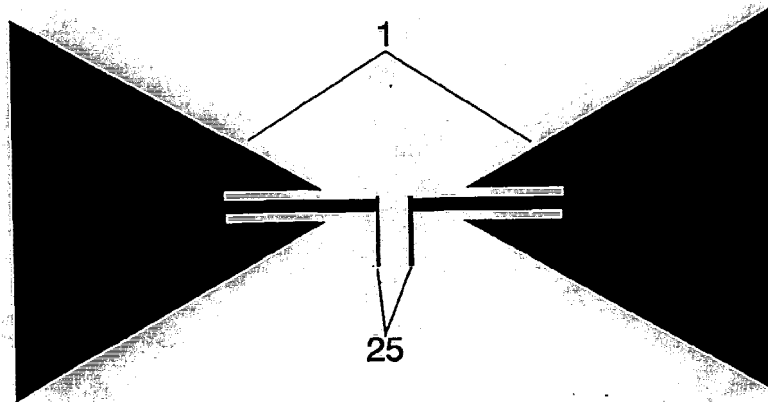


FIG.5

6/7

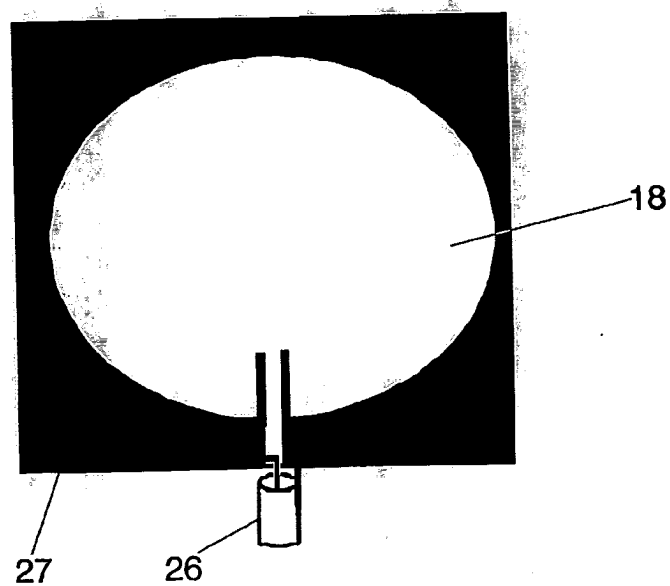
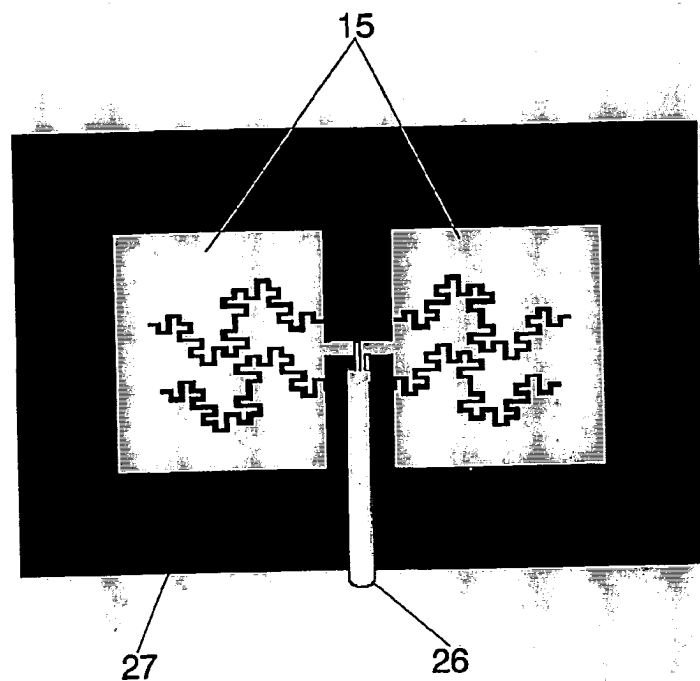


FIG.6

7/7

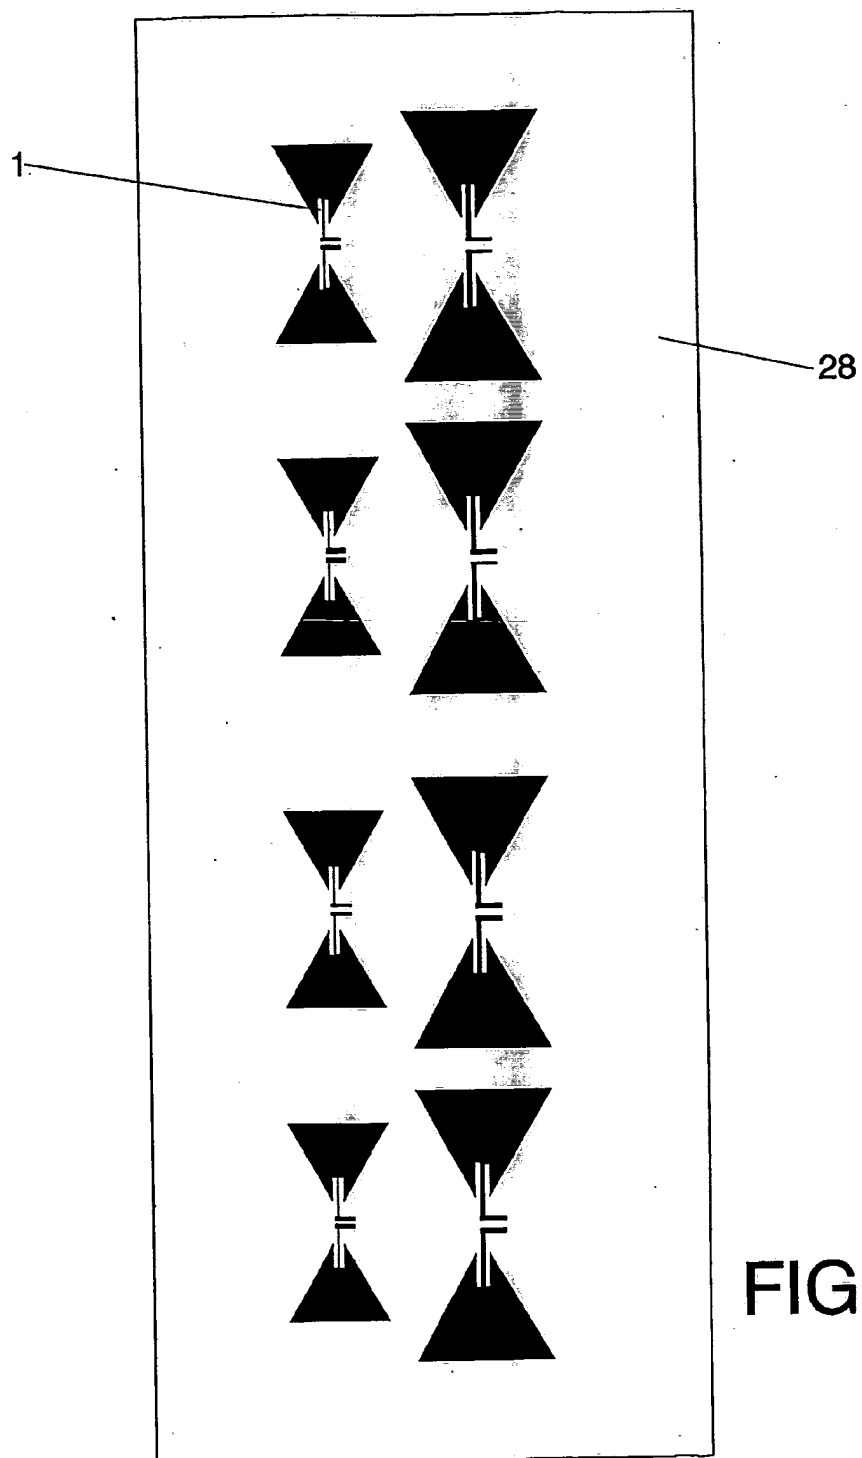


FIG. 7

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP 02/07837

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H01Q5/00 H01Q9/04

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 211 825 B1 (DENG SHENG-MING) 3 April 2001 (2001-04-03)	1-5
Y	column 4, line 45 - line 61; figures 8A-8K ---	6,9-13
X	US 4 072 951 A (KALOI CYRIL M) 7 February 1978 (1978-02-07)	1-5
Y	figures 3,9 ---	9-11
X	EP 0 892 459 A (NOKIA MOBILE PHONES LTD) 20 January 1999 (1999-01-20)	1-4
Y	figures 1,7 ---	6
X	EP 0 997 974 A (LK PRODUCTS OY) 3 May 2000 (2000-05-03)	1,2
Y	figures 6,8 ---	12
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search

20 March 2003

Date of mailing of the international search report

27/03/2003

Name and mailing address of the ISA

European Patent Office, P.B. 6818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Saur, E

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP 02/07837

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 01 54225 A (FRACTUS S A ; ANGUERA PROS JAIME (ES); PUENTE BALIARDA CARLES (ES);) 26 July 2001 (2001-07-26) figures 1-25	13
X	PATENT ABSTRACTS OF JAPAN vol. 1997, no. 06, 30 June 1997 (1997-06-30) -& JP 09 051223 A (MITSUBISHI ELECTRIC CORP), 18 February 1997 (1997-02-18) abstract; figure 10	15,17,18

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 02/07837

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6211825	B1	03-04-2001	TW 431033 B	21-04-2001
US 4072951	A	07-02-1978	US 4155089 A	15-05-1979
			US 4151530 A	24-04-1979
			US 4151531 A	24-04-1979
			US 4157548 A	05-06-1979
			US 4151532 A	24-04-1979
EP 0892459	A	20-01-1999	FI 972897 A	09-01-1999
			EP 0892459 A1	20-01-1999
			FI 981571 A	09-01-1999
			US 6140966 A	31-10-2000
EP 0997974	A	03-05-2000	FI 105061 B1	31-05-2000
			AT 211861 T	15-01-2002
			CN 1260606 A	19-07-2000
			DE 69900773 D1	28-02-2002
			DE 69900773 T2	14-08-2002
			DK 997974 T3	04-03-2002
			EP 0997974 A1	03-05-2000
			US 6366243 B1	02-04-2002
WO 0154225	A	26-07-2001	WO 0154225 A1	26-07-2001
			AU 3150000 A	31-07-2001
			EP 1258054 A1	20-11-2002
JP 09051223	A	18-02-1997	JP 3216485 B2	09-10-2001



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**